



LOGIC & GENIUS

Energy-efficient ventilation system with heat recovery

GENERAL

Our central ventilation units, LOGIC and GENIUS, are energy-efficient systems designed to provide fresh air, making them ideal for use in homes.

They not only ensure continuous air exchange and reduce humidity for a healthier indoor climate, but they also help lower heating costs by transferring heat from used indoor air to incoming fresh outdoor air.

These well-equipped ventilation units offer selectable air capacities of 200 m³/h or 150 m³/h and are available with a mechanical (GENIUS) or electronic bypass (LOGIC), allowing for flexible expansion.

Optional enhancements such as CO₂ and humidity sensors, a separate preheater for air pre-warming, an enthalpy exchanger for moisture recovery, or integration into smart home systems provide maximum flexibility.


With their modern, slim design (only 180mm deep), they allow for versatile installation—whether vertically on the wall or space-savingly under the ceiling. The universal connection and placement options make GENIUS and LOGIC suitable for almost any home and installation scenario.

Easy installation, simple maintenance, and low costs make these high-efficiency ventilation units particularly appealing.



Device Cover

Removable cover for easy installation and cleaning



No Vibrations

Simple mounting that dampens potential vibrations to the structure without needing rubber buffers.



Execution / Position

Orientation (left/right) can be adjusted with a button.




„Muliflow“

Switch the nominal volume flow to 150 or 200 m³/h directly on the device



92% Heat recovery



Premium Filters

Filter class M5 (ePM 1055%) or
Filter class F7 (ePM 50%)



Connections

Connect up to 12 semi-rigid
ducts possible (Ø75mm)



100% Seal



Vertical and horizontal installation



Space-saving, only 210 mm deep




Low noise level



Control Panel

Wired control unit for operation. Power cable 10m - included



VARIANTS

The devices can be installed flexibly, either in left or right configurations, allowing optimal airflow and easier maintenance access. Switching is simple and convenient with a toggle.



EHA Exhaust of used, warm air
(Outgoing air)




ETA Extraction of used, warm air
from the building (Exhaust air)

ODA Intake of fresh, cold outside air
(Fresh air)

SUP Supply of fresh air into the
building (Supply air)



CONTROL PANEL

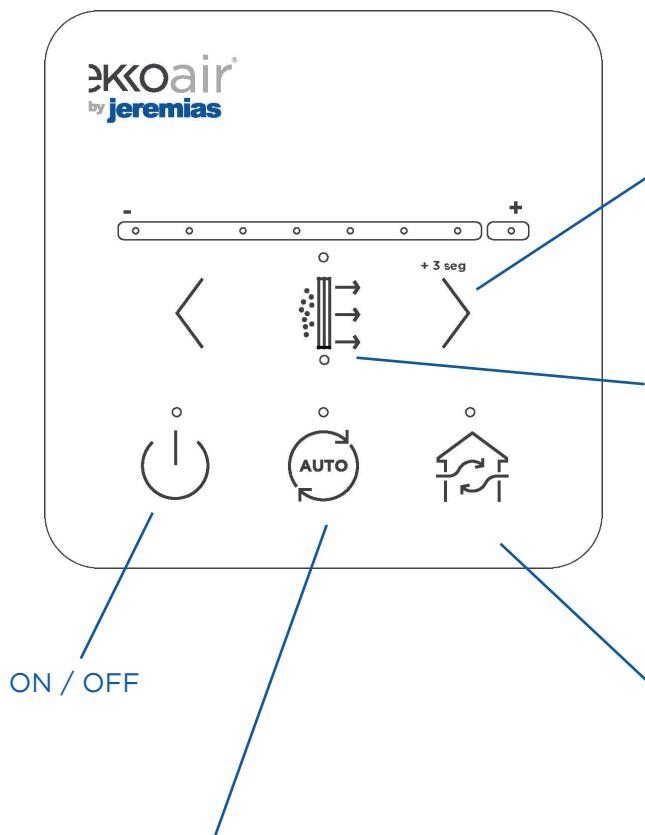

Select between manual mode and sensor-controlled automatic mode.




The control unit can optionally be expanded with a Wi-Fi module (accessory), allowing convenient operation via an online app. Additionally, it supports integration with a building automation system using ModBus.

BYPASS FUNCTIONS

On cool summer nights, alongside regular ventilation (like opening windows), the device's bypass function can also be used. The bypass reroutes the exhaust around the heat exchanger, preventing the "cool" fresh air from being warmed by the outgoing air.



LOGIC

In the LOGIC system, the device with electronic bypass, the exhaust fan is turned off during bypass operation. This allows only fresh, cool night air to enter the building without any exhaust air being directed outside.

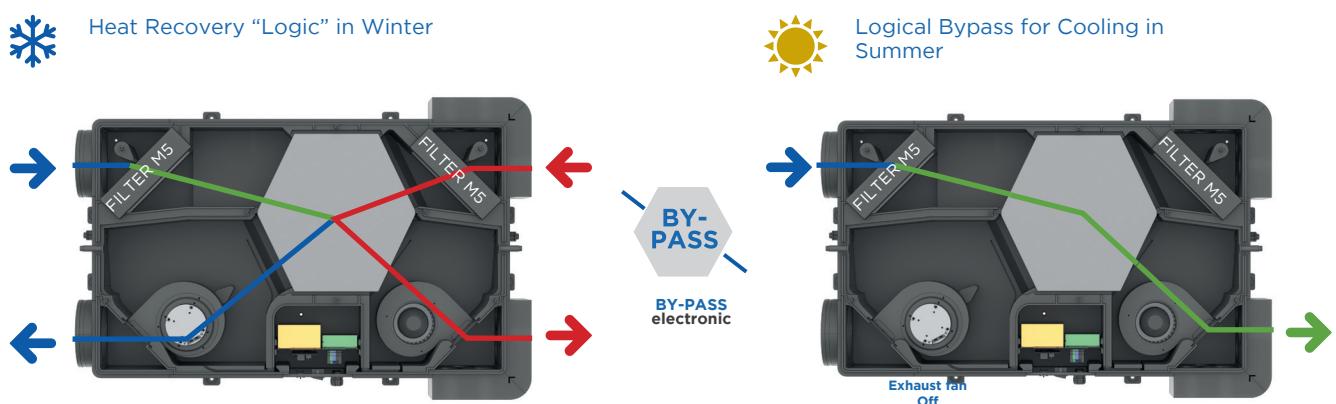

GENIUS

The mechanical bypass ensures that fresh air can be supplied when needed without heat recovery. A flap opens the bypass channel while closing the recuperation section to prevent heat exchange between the air streams.

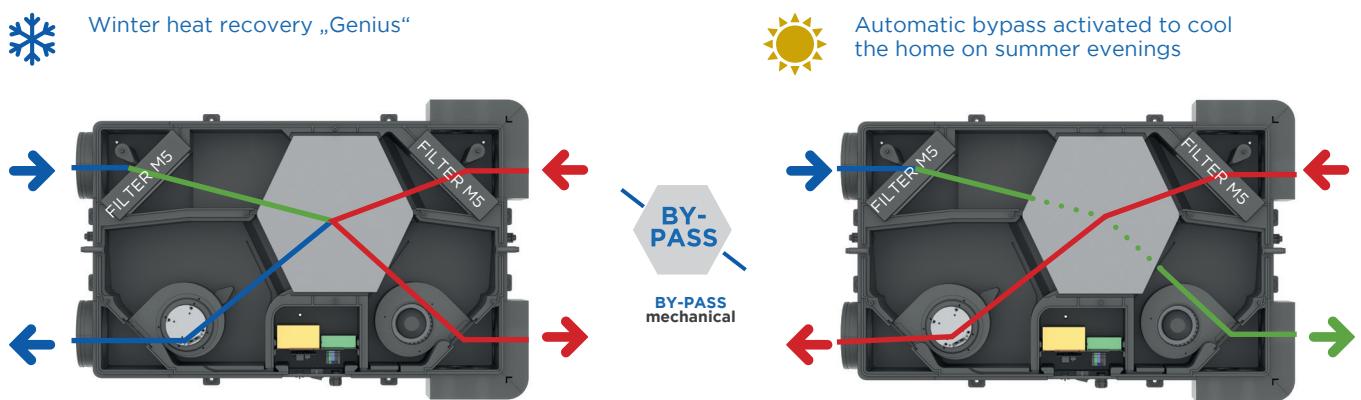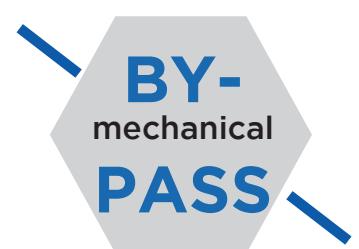


TECHNICAL PARAMETERS

Both devices offer similar specifications, including filter type, low noise levels, and device dimensions.

Parameter	Unit	150m ³ /h							200m ³ /h													
Max. Flow Rate	m ³ /h	150							200													
Sfp (70% Qvd)	W/m ³ /h	0,29							0,29													
Sound Pressure LPa-3m*	dB	42							45													
Diameter of Connectors	mm	2xØ130/Ø160 + 2x 6Ø75							2xØ130/Ø160 + 2xØ75													
Control		8 Speeds																				
Mounting / Installation		Wall and Ceiling Mount																				
IP		IP30																				
Filter Type		M5 Coarse Filter 90% ISO 16890																				
Weight	kg	20																				
Dimensions	mm	970x600x210																				
Multifunction Control	Speed Level	1	2	3	4	5	6	7	boost	1	2	3	4	5	6	7	boost					
	m ³ /h	50	65	80	105	120	135	150	150	50	75	90	120	145	180	200	200					
Cover & Body		EPP + Metal Cover																				
Performance**	%	89							88													

* In open field at the reflection plane

** According to UNE EN 308 at 70% of nominal flow rate

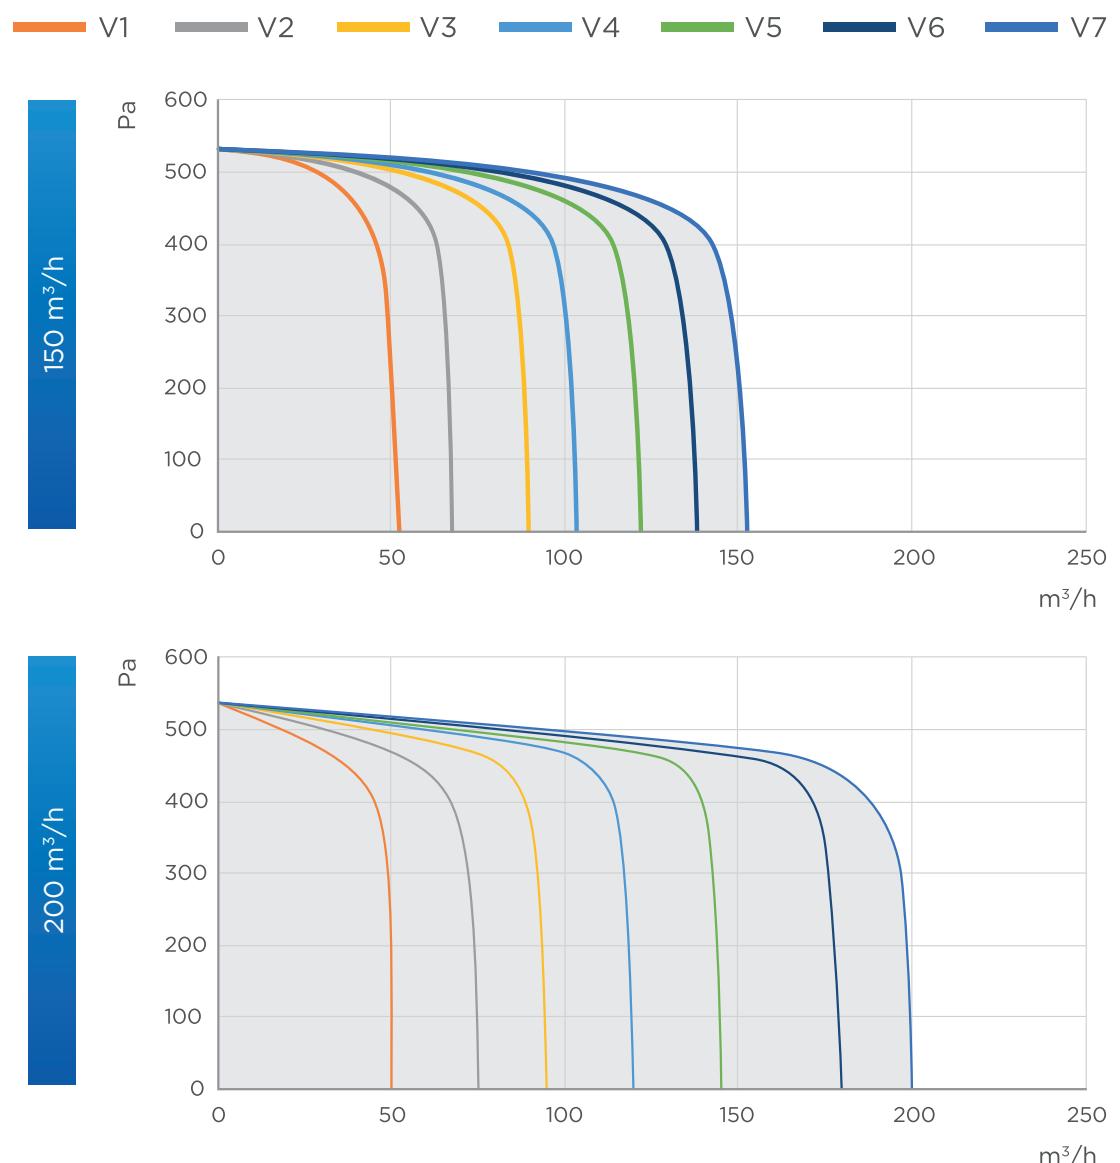

OPTIONAL ENHANCEMENTS

USE OF AN ENTHALPY EXCHANGER

An enthalpy exchanger ensures a comfortable living or room environment by recovering both heat and moisture. It's perfect for combating dry air in the winter, protecting health, preventing irritation of the respiratory system, and preserving furniture and wooden floors. At the same time, it reduces heating and cooling costs and lowers energy consumption.



The LOGIC and GENIUS can be ordered with or without an enthalpy exchanger.

CONDITIONS INDOORS (RELATIVE HUMIDITY %)



ADDITIONAL SENSORS

Our extensive range of accessories contributes to the fact that the LOGIC and GENIUS even more versatile and precise.

For instance, a CO₂ sensor, a humidity sensor (RH), or a combined CO₂/RH sensor can be installed. These sensors allow the system to automatically adjust airflow to ensure optimal air conditions.



IMPACT OF CO₂ CONCENTRATION ON HUMANS

The built-in CO₂ sensor automatically adjusts the ventilation system as needed, within a range of about 600 to 1,200 ppm. This ensures optimal comfort while keeping operating costs low.



PRE- AND POST-HEATERS

A pre-heater can be optionally added to prevent icing in the heat exchanger and ensure the device's efficiency during winter by warming the incoming air. Without it, cold outdoor temperatures could cause moist exhaust air in the heat exchanger to condense and freeze, blocking airflow and damaging the device.

A post-heater is used when heat recovery alone is not enough to maintain a comfortable temperature in the house. Pure heat recovery can only raise the temperature up to the exhaust air temperature.

Pre-heaters and post-heaters are available as optional accessories.



VENTILATION SYSTEMS

LOGIC



403-COVE80N0001

GENIUS™



403-COVE79N0001

DEVICE	HEAT EXCHANGER TYPE	BYPASS	ORDER CODE	PRICE
BASIC		electronic	403-COVE185N0001	1.247 €
LOGIC	Heat recovery	electronic	403-COVE80N0001	1.513 €
GENIUS		mechanical	403-COVE79N0001	1.664 €
BASIC-e		electronic	403-COVE00171	1.511 €
LOGIC-e	Enthalpy exchanger	electronic	403-COVE00172	1.778 €
GENIUS-e		mechanical	403-COVE187N0001	1.928 €

ACCESORIES



FILTER	ORDER CODE	PRICE
Filter M5 - Coarse 90% ISO 16890	403-COVE100N0003	17 €
Filter F7 - ePM1 50 % ISO 16890	403-COVE100N0004	17€



MODULE	ORDER CODE	PRICE
Wifi-Module	403-COVE100N0011	156 €



SENSORS	ORDER CODE	PRICE
CO ₂ Sensor	403-COVE100N0013	89 €
RH Sensor (Relative humidity)	403-COVE100N0014	48 €
Combined CO ₂ + RH Sensor	403-COVE100N0015	114 €
Hub	403-COVE100N0016	11 €



CORE	ORDER CODE	PRICE
Heat Recovery core	403-COVE180N0001	58 €
Enthalpy core	403-COVE100N0007	158 €



HEATER	ORDER CODE	PRICE
External Preheater Ø 160mm, 0,6kW 1-phasig	403-COVE100N0005	90 €
External Afterheater Ø 160mm, 1kW, 1-phasig	403-COVE100N0006	226 €
External water heater/cooler unit Ø 125mm, 3-reihig	403-COVE193N0001	353 €
External water heater/cooler unit Ø 160mm, 3-reihig	403-COVE194N0001	364 €



SIPHON	ORDER CODE	PREIS
Siphon	403-COVE103N0001	

GERMANY

Jeremias Abgastechnik GmbH
Opfenrieder Str. 12
D-91717 Wassertrüdingen
Phone: +49 9832 6868-50
Mail: welcome@jeremias-group.com
www.jeremias.de

POLAND
www.jeremias.pl

USA
www.jeremiasinc.com

SPAIN
www.jeremias.es

CROATIA
www.jeremias.hr

ITALY
www.jeremias.it

CZECH REPUBLIC
www.jeremias.cz

FINLAND
www.jeremias.fi

FRANCE
www.jeremias.fr

UNITED KINGDOM
www.jeremias.uk

JEREMIAS IS REPRESENTED IN THE FOLLOWING COUNTRIES:

Austria | Switzerland | Belarus | Belgium | Brazil | Bulgaria | China (Hongkong) | Denmark | Estonia | Greece | Hungary | Ireland | Kazakhstan | Latvia | Liechtenstein | Lithuania | Luxembourg | Malta | Mexico | Moldova | Netherlands | Norway | Portugal | Romania | Saudi Arabia | Serbia | Singapore | Slovakia | Slovenia | South Africa | Sweden | Tunisia | Ukraine | United Arab Emirates

Jeremias high quality products to be installed only by
selected experts.

